


ACTIROX AF799




VSM CERAMICS

Grain type	Ceramic
Bonding	Full-Resin bonded
Color	White
Backing	Vulcanized fiber
Production width	58 in

Materials




Features



Improved chip clearance results in a longer service life and high stock removal rates. Especially when grinding aluminum and non-ferrous metals. The open coating of ceramic grain with self-sharpening effect also offers an impressively aggressive cutting action.


Grit range:1)



Benefits

- > Self-sharpening effect results in an extremely high stock removal rate thanks to constant recreation of sharp grain points.
- > The additional ALU-X layer considerably reduces chip adhesion and therefore the clogging of abrasive.
- > Reduced adhesive of swarf extends the service life, resulting in fewer tool changes and therefore increased productivity.
- > Form-resistant vulcanized fiber backing.

Grain technology

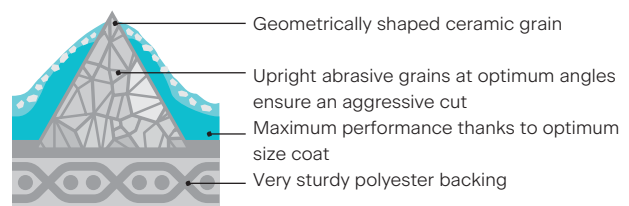

The plus in grinding performance

Practice has shown that ACTIROX abrasives have a **higher abrasive performance than comparable** conventional abrasives – with a consistent surface finish.

You achieve higher stock removal than you would expect with the specified grit size, but you do not get a rougher surface. A real plus for your grinding process.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA
T +1 800 737 0176 · F +1 636 272 6394
us.info@vsmabrasives.com · www.us.vsmabrasives.com

1) Further grit sizes upon request. Subject to technical changes.

