



# KK812X

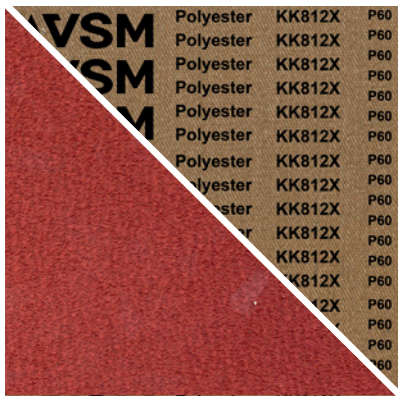

## VSM ALUMINIUM OXIDE




|                         |   |
|-------------------------|---|
| <b>Grain type</b>       | Aluminium oxide                               |
| <b>Bonding</b>          | Full-resin bonded                             |
| <b>Colour</b>           | Red-brown                                     |
| <b>Backing</b>          | X-Polyester (P36-P80)<br>X-Cotton (P100-P180) |
| <b>Flexibility</b>      | Sturdy  |
| <b>Production width</b> | 1,480 mm                                      |

### Materials



### Features



High-performance aluminium oxide abrasive for universal use. KK812X is characterised by a long service life and cool grinding. Also suitable for grinding with water or emulsions up to grit size P80.

### Grit sizes:<sup>1)</sup>



## Benefits

- > Long service life
- > High performance abrasive
- > Highly resilient
- > Cool cutting

**VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG**  
Siegmundstraße 17 · 30165 Hanover · Germany  
T +49 511 3526 479 · F +49 511 3521 315  
sales@vsmabrasives.com · [www.vsmabrasives.com](http://www.vsmabrasives.com)



<sup>1)</sup> P = Categorized according to the FEPA standard. Further grit sizes upon request. Subject to technical changes.