

Segments

Applications

Products



**VSM CERAMICS Plus**  
**VSM CERAMICS**

**Next-generation abrasive for  
high stock removal applications**

VSM Series	Backing Material	Backing Flex	Special Feature	Grit Size														Product Form						
				20	24	36	40	50	60	80	100	120	150	180	240	320	400	Narrow Belt	Wide Belt	Discs	Rolls	Sheets		
<b>VSM CERAMICS</b>																								
XP780	Paper	"F"Weight							■	■	■	■								○	○	○		
XK870F	Cotton	Very Flexible	TS						□	■	■	■	■	■	■	□	□	□		○		○	○	○
XK870J	Polyester	Flexible	TS, ♠					■	■	■	■	■								○		○		
XK870T	Cotton	Moderate	TS			■	■		■	■		■								○		○		
XK875X	Polyester	Sturdy	TS, ♠		■	■	■	■	■	■	■	■								●	●	●		
XK870X	Polyester	Sturdy	TS, ♠		■	■	■	■	■	■	■	■								●	●	●		
XK760X	Polyester	Sturdy	♠		■	■	■	■	■	■	■	■								●	●	●		
XK733X**	Polyester	Sturdy	ST, ♠			■			■	□										●	●	●		
XK885Y*	Polyester	Very Sturdy	TS, ♠	■	■	■	■	■	■	■	■	■								●	●			
XK880Y*	Polyester	Very Sturdy	TS, ♠	■	■	■	■	■	■	■	■	■								●	●			
XK870Y	Polyester	Very Sturdy	TS, ♠					□	□											●	●			
XK760Y	Polyester	Very Sturdy	♠	□	□	□			■	□	□	□								●	●	●		
XK888Z	Polyester	Extremely Sturdy	TS, ♠		□	■														●	●			
XK877Z	Polyester	Extremely Sturdy	TS, ♠	■	■	■	■	■	■											●	●			
<b>VSM CERAMICS Fiber Discs</b>																								
XF870	Fiber		TS		■	■	■	■	■	■	■	■										●		
XF733**	Fiber		ST		■	■			■	■												●		
XF760	Fiber				■	■	■	■	■	■		□										●		
XF885*	Fiber		TS	■	■	■	■	■	■	■	■	■										●		


\*VSM CERAMICS Plus  
\*\*VSM STEARATE Plus

VSM CERAMICS products have an inherent crystalline structure that regenerates many times over. This unique process increases the product lifespan, while maintaining a constant cut rate under minimal additional pressure.


The VSM CERAMICS Plus series is manufactured in a way that results in a much finer crystalline structure (as depicted in the drawing below), providing the product even longer life and a more aggressive cut.

▶ All VSM CERAMICS and VSM CERAMICS Plus products are ideal for high stock removal applications, with an excellent price/performance ratio. Lower grinding temperature and less friction are an added benefit.

Please see the VSM STEARATE Plus brochure for more information on this product.

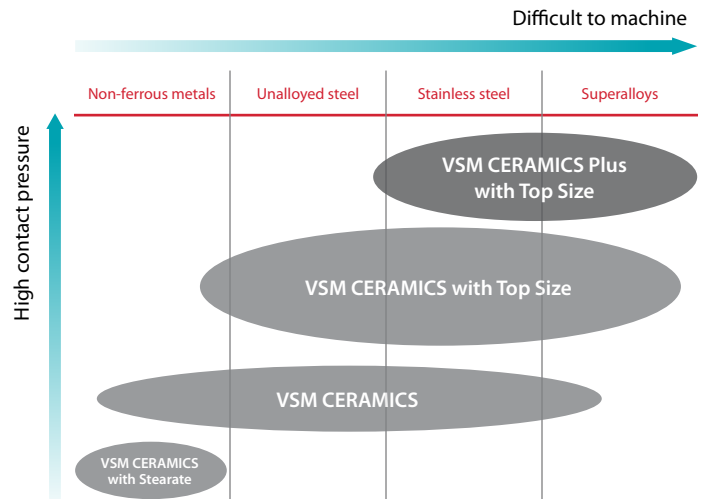

SYMBOL KEY		
TS	TOP SIZE	(helps reduce friction and heat)
ST	STEARATE	(helps prevent loading)
AS	ANTISTATIC	
♠	Suitable for Wet Applications	
■	Stocked Product	
□	Available, Not Stocked	
○	For low to medium contact pressure	
◎	For medium contact pressure	
●	For medium to high contact pressure	

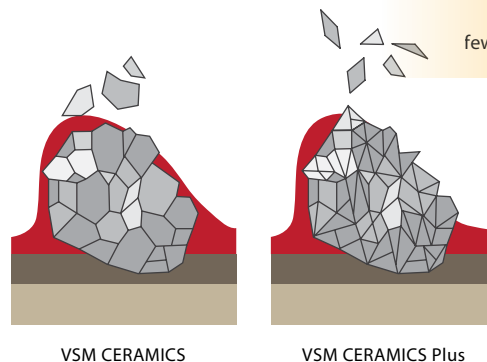

Availability is subject to change.

**VSM Abrasives Corporation**  
1012 East Wabash Street  
O Fallon, MO 63366  
T +1 800 737 0176  
F +1 636 272 6394  
us.info@vsmabrasives.com  
us.vsmabrasives.com

VSM is the registered trademark of VSM - Vereinigte Schmirgel- und Maschinen-Fabriken AG, Hammover. We reserve the right to technical alteration. VSM - 10.18/v4/en