


ZK744X



VSM ZIRCONIA ALUMINA


Grain type	Zirconia alumina
Bonding	Full-resin bonded
Color	Blue
Backing	X-Polyester
Flexibility	Sturdy
Production width	58 in



Materials



Features



Ideal for rough grinding tasks such as beveling. Thanks to the additional TOP SIZE grinding-active layer, it also prevents discoloration of the workpiece when dry grinding stainless steel. It can also be used in wet grinding.


Grit range: ¹⁾



Benefits

- > High stock removal
- > Self-sharpening effect constantly produces new sharp edges and thus enables much higher stock removal rates
- > Very long service life
- > Cool cutting

Wear pattern of the grain

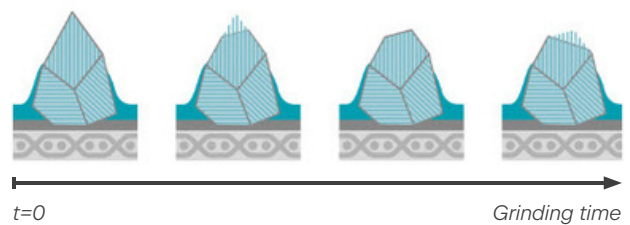

Aluminum oxide and zirconium oxide are finely dispersed throughout the microstructure of VSM ZIRCONIA ALUMINA. During the grinding process, the materials wear down alternately.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA
 T +1 800 737 0176 · F +1 636 272 6394
 us.info@vsmabrasives.com · www.us.vsmabrasives.com

¹⁾ Further grit sizes upon request. Subject to technical changes.

