VSM
WE KNOW ABRASIVES

XK888Z

TOP SIZE

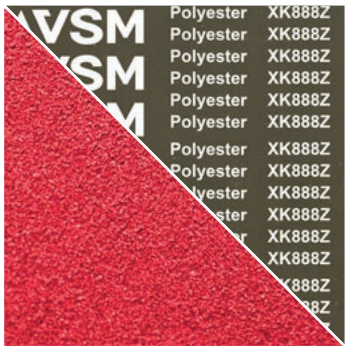

VSM CERAMICS

Grain type	Ceramic
Bonding	Full-resin bonded
Colour	Red
Backing	Z-Polyester
Flexibility	Extremely sturdy
Production width	1,480 mm

Materials

Features

Ceramic grain abrasive with a closed coat and self-sharpening effect on a extremely sturdy polyester cloth backing: offers impressive results when working on very hard surfaces with aggressive cut and a very long service life. The extremely sturdy backing was developed to meet the demanding requirements of maximum contact pressure – such as when chamfering. The additional TOP SIZE layer improves stock removal while reducing the temperature in the grinding zone.

Grit range:[1)]

16	20	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200
□	□	■	□	■	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□

Benefits

- Self-sharpening effect results in an extremely high stock removal rate thanks to constant recreation of sharp grain points
- The additional grinding active layer VSM TOP SIZE ensures a cool cut and an extended service life
- Extreme highly resilient
- High wear resistance

Wear pattern of the grain

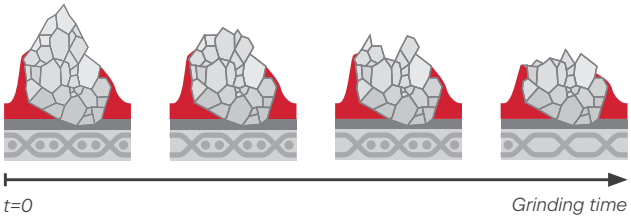

The microcrystalline structure of the **VSM CERAMICS** series enables a much more subtle breaking down of the grain and constantly produces new sharp edges.

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17 · 30165 Hanover · Germany
T +49 511 3526 479 · F +49 511 3521 315
sales@vsmabrasives.com · **www.vsmabrasives.com**

MADE IN GERMANY

FEPA

[1)] Further grit sizes upon request. Subject to technical changes.

P/XK888Z/03.WW/02.23/en/1