


KK112F

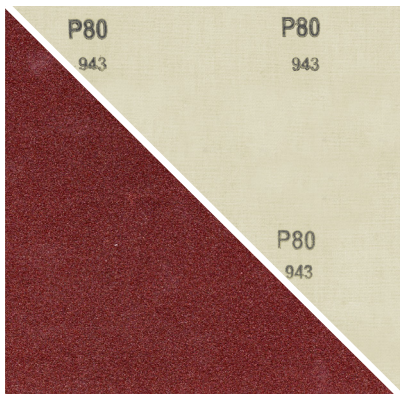

VSM ALUMINIUM OXIDE

Grain type	Aluminium oxide
Bonding	Full-resin bonded
Colour	Red-brown
Backing	F-Cotton
Flexibility	Very flexible
Production width	1,400 mm

Materials



Unalloyed steel

Wood

Features



Low to medium pressure

Medium dose coated

Aluminum oxide abrasive on a very flexible cotton backing for universal use in off-hand grinding, for cylindrical and profile grinding.

Grit sizes: ¹⁾



Benefits

- > Long service life
- > Universally applicable
- > Very good adaptation to the workpiece
- > Thread-ripping tear behavior
- > Outstanding price-performance ratio

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG

Siegmundstraße 17 · 30165 Hannover · Germany
T +49 511 3526 0 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com



Please scan this QR code for detailed product information.



¹⁾ P = Categorized according to the FEPA standard. Subject to technical changes.