



QUICK CHANGE DISCS

Quick Change Discs

Small, yet powerful solution

Ideal for small work areas, quick change discs are commonly seen in use with die grinders. Their tool-free attachment system goes by many names, yet is favored by professionals worldwide for providing a “quick change” of parts. Common applications include stock removal, deburring and blending on metals, such as carbon steel, stainless steel and aluminum.

Diameter	Backing Type	Grit Size			Diameter	Backing Type	Grit Size							Diameter	Backing Type	Grit Size																			
		CPS	MED	VFN			P36	P40	P50	P60	P80	P100	P120			36	40	50	60	80	100	120	20	24	36	40	50	60	80						
VSM NON-WOVEN				VSM ALUMINUM OXIDE								VSM CERAMICS*								VSM CERAMICS Plus*															
2"	SFO1	■	■	■	2"	SFO1	■	■	■	■	■	■	■	■	2"	SFO1	■	■	■	■	■	■	■	■	■	■	2"	SFO1	□	□	■	■	■	■	■
2"	SFO3	■	■	■	2"	SFO3	■	□	■	■	■	■	■	■	2"	SFO3	■	■	■	■	■	■	■	■	■	■	2"	SFO3	□	□	■	■	■	■	■
3"	SFO1	■	■	■	3"	SFO1	■	□	■	■	■	■	■	■	3"	SFO1	■	■	■	■	■	■	■	■	■	■	3"	SFO1	□	□	■	■	■	■	■
3"	SFO3	■	■	■	3"	SFO3	■	■	■	■	■	■	□	■	3"	SFO3	■	■	■	■	■	■	■	■	■	■	3"	SFO3	□	□	■	■	■	■	■

*also available with a STIFF BACK


*also available with a STIFF BACK

Resin fiber option increases longevity

For more demanding applications, a fiber-backed quick change disc should be considered. The sturdy, resilient backing provides a longer product lifespan for increased product output.

Diameter	Backing Type	Grit Size							
		20	24	36	50	60	80	100	120
VSM CERAMICS Plus									
1 1/2"	SFO3	□	□	□	□	□	□	□	□
2"	SFO3	■	■	■	■	■	■	■	■
3"	SFO3	■	■	■	■	■	■	■	■
Hub color ▶		■	■	■	■	■	■	■	■

Diameter	Backing Type	Grit Size							
		20	24	36	50	60	80	100	120
VSM ACTIROX									
1 1/2"	SFO3			■					
2"	SFO3			■					
3"	SFO3			■					
Hub color ▶									

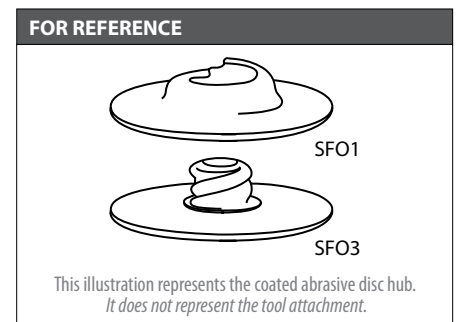

Item No.	Description
Accessories	
80639	1 1/2" SFO3 Holder
70812	2" SFO1 Holder
70814	2" SFO3 Holder
70815	3" SFO1 Holder
70817	3" SFO3 Holder

SYMBOL KEY	
TS	TOP SIZE (helps reduce friction and heat)
ST	STEARATE (helps prevent loading)
AS	ANTISTATIC
◆	Suitable for Wet Applications
■	Stocked Product
□	Available, Not Stocked
○	For low to medium contact pressure
◎	For medium contact pressure
●	For medium to high contact pressure

Availability is subject to change.

VSM Abrasives Corporation
 1012 East Wabash Street
 O Fallon, MO 63366
 T +1 800 737 0176
 F +1 636 272 6394
 us.info@vsmabrasives.com
 us.vsmabrasives.com