



# ZK713T

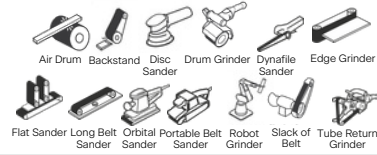


## VSM ZIRCONIA ALUMINA

<b>Grain type</b>	Zirconia alumina
<b>Bonding</b>	Full-resin bonded
<b>Color</b>	Blue
<b>Backing</b>	T-Cotton
<b>Flexibility</b>	Semi-flexible
<b>Production width</b>	58 in

### Materials



### Features



Universally applicable, semi-flexible zirconia alumina abrasive. Achieves aggressive grinding on tough material surfaces, even with only moderate contact pressure. In addition to XK870T, it is also suitable for machining unalloyed steels.


### Grit range:<sup>1)</sup>



## Benefits

- > High stock removal
- > Self-sharpening effect constantly produces new sharp edges and thus enables a much better grinding performance
- > Low price-performance ratio
- > Good adaptation to the workpiece
- > Cool cutting

## Wear pattern of the grain

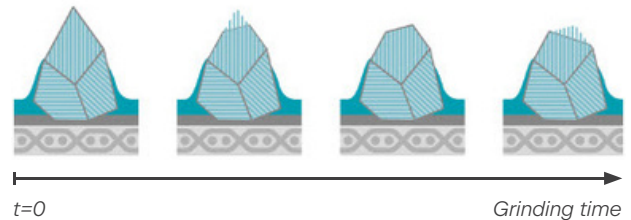

Aluminum oxide and zirconium oxide are finely dispersed throughout the microstructure of VSM ZIRCONIA ALUMINA. During the grinding process, the materials wear down alternately.

### VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA  
 T +1 800 737 0176 · F +1 636 272 6394  
 us.info@vsmabrasives.com · [www.us.vsmabrasives.com](http://www.us.vsmabrasives.com)

<sup>1)</sup> Further grit sizes upon request. Subject to technical changes.

