


XK888Z TOP SIZE




VSM CERAMICS


Grain type	Ceramic
Bonding	Full-resin bonded
Color	Red
Backing	Z-Polyester
Flexibility	Extremely sturdy
Production width	58 in



Materials

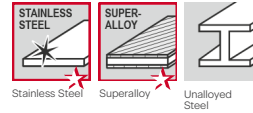

Features



Ceramic grain abrasive with a closed coat and self-sharpening effect on a extremely sturdy polyester cloth backing: offers impressive results when working on very hard surfaces with aggressive cut and a very long service life. The extremely sturdy backing was developed to meet the demanding requirements of maximum contact pressure – such as when chamfering. The additional TOP SIZE layer improves stock removal while reducing the temperature in the grinding zone.


Grit range: ¹⁾



Benefits

- > Self-sharpening effect results in an extremely high stock removal rate thanks to constant recreation of sharp grain points
- > The additional grinding active layer VSM TOP SIZE ensures a cool cut and an extended service life
- > Cool grinding and extension of service lives with VSM TOP SIZE grinding-inducing additional layer
- > High wear resistance

Wear pattern of the grain

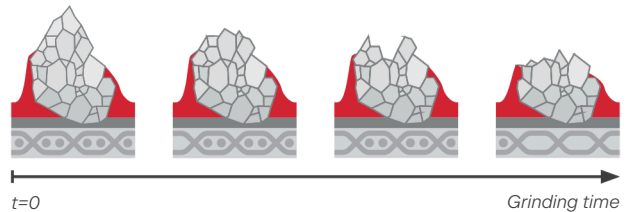

The microcrystalline structure of the VSM CERAMICS series enables a much more subtle breaking down of the grain and constantly produces new sharp edges.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA
 T +1 800 737 0176 · F +1 636 272 6394
 us.info@vsmabrasives.com · www.us.vsmabrasives.com

¹⁾ Further grit sizes upon request. Subject to technical changes.

