


KK772J



VSM COMPACTGRAIN



Grain type	Aluminium oxide granulate
Bonding	Full-resin bonded
Colour	Grey
Backing	J-Polyester
Flexibility	Flexible
Production width	1,090 mm

Materials



Stainless Steel Unalloyed steel

Features



Low to medium pressure Medium coated



Also for wet grinding



Long-term abrasive for applications with low contact pressure or in combination with soft contact elements. The flexible backing enables the abrasive belt to mould well around contoured workpieces, such as punched parts. KK772J also achieves very good results in flat grinding when working with stainless steel and unalloyed steel.


Grit sizes:¹⁾



Benefits

- > Long-term abrasive with continual self-sharpening effect achieves extremely long service life
- > Reduction of grinding costs through lower tool consumption and fewer tool changes
- > For uniform workpiece surfaces and surface roughnesses with constant stock removal

Wear pattern of the grain

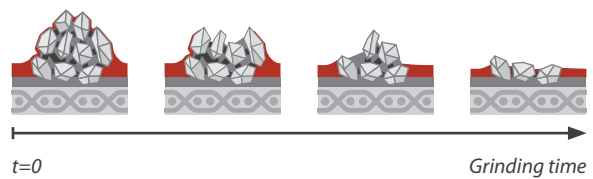

VSM COMPACTGRAIN series are completely made of granules which consist of numerous abrasive grains. The used grains are torn out by the cutting forces involved whereby unused grain tips are being exposed.

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17 · 30165 Hanover · Germany
T +49 511 3526 479 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com



¹⁾ P = Categorized according to the FEPA standard. Further grit sizes upon request. Subject to technical changes.